


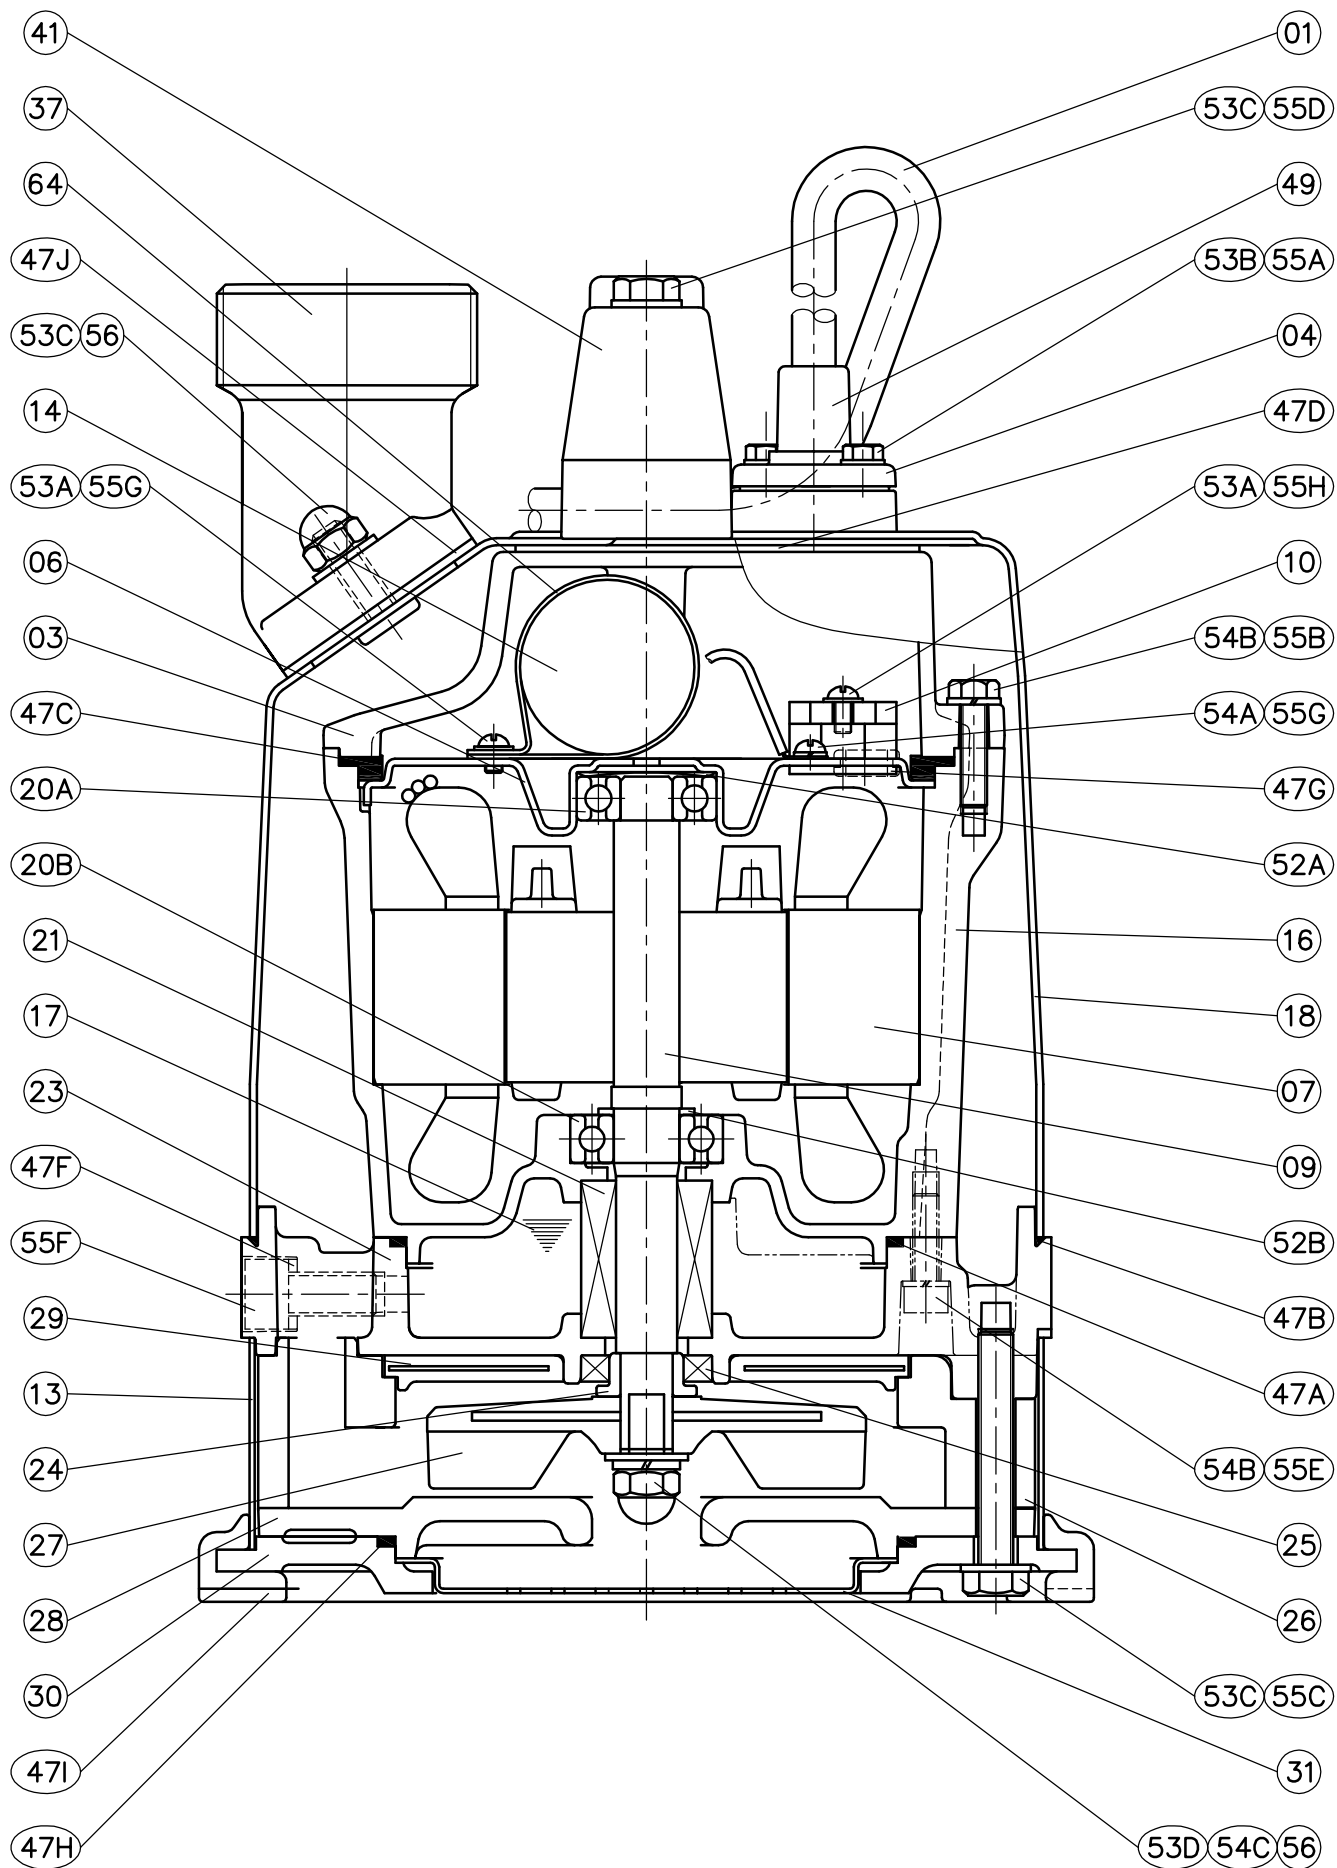

GDR-400(A)

230V

GDR-400(A)-230V

Poz	Název dílu	Číslo dílu	SAP	Materiál	Specifikace	ks	CZK/ks	EUR/ks
01	kabel+vývodka	E01-1032-3	E01-0103HEERA10-0	H07RN-F	3G 1,0mm ² - 10m, E pr.9,2 RA	1	1 400,-	57,2
03	horní kryt	I03-1G01-0	I03-0125IC000000-0	ADC12 (AL-alloy)	I125-C-61	1	380,-	15,6
04	kryt kabelové vývodky	A04-1E11-0	A04-0B034000000-0	SUS 304	B-34-8 RA	1	50,-	2,1
06	těleso ložiska horní	D06-1G01-0	D06-0125IC00001-0	SECD (steel + Zn)	I125-P-23.6	1	160,-	6,6
07	stator A	E07-0722-0	E07-0E20412B900-0		125*65*40-2P 0,4kW 1f 12B-1	1	3 300,-	134,7
07	stator B	E07-0728-0	E07-0E20412B200-0		125*65*40-2P0,4kW1f12B	1/A	3 140,-	128,2
09	rotor A	A09-0722-0	A09-0E0151B0000-0	SUS 410	2P-64,3*15*39-165-1f B	1	760,-	31,1
09	rotor B	A09-0723-0	A09-0E0151B0002-0	SUS 410	2P-64,4*15*39-166-1f B	1/A	940,-	38,4
10	tepelná ochrana	E10-1074-0	E10-0H112000006-0		AC12-04XB (do 2026)	1	450,-	18,4
13	plášť spirály	A13-1G01-0	A13-0C180000000-0		C-179,5-48,5	1	470,-	19,2
14	kondenzátor A	E14-0110-0	E14-0R011450X00-0		R-11uF*450V-85°C-pr.40*60-UVC	1	220,-	9,0
14	kondenzátor B	E14-0124-0	E14-0R012450000-0		R-12uF*450V-pr.40*60-187 UVC	1/A	240,-	9,8
16	plášť motoru	I16-1G01-0	I16-0125IC00000-0	ADC12 (AL-alloy)	I125-C-118	1	710,-	29,0
17	olejová náplň	I17-7600-0	I17-0DS32AWS000-0		ISO VG32, NO76	0,2	80,-	3,3
18	plášť čerpadla	D18-1G01-0	D18-0125UZ00100-0	SPCE	125U-1f-158.5	1	1 400,-	57,2
20A	ložisko horní	F20-2013-0	F20-06201A00000-0		6201 ZZ	1	130,-	5,4
20B	ložisko spodní	F20-2023-0	F20-06202A00000-0		6202 ZZ	1	140,-	5,8
21	mechanická ucpávka A	F21-1142-0	F21-0B014NS0000-0	SiC/SiC+CA/GE	ED560N-M14 SiC	1	870,-	35,6
21	mechanická ucpávka B	F21-1151-0	F21-0B015NS0002-0	SiC/SiC+CA/GE	ED560N-M15 SiC1.2	1/A	1 080,-	44,1
23	těleso ucpávky	I23-1G01-0	I23-0125I000000-0	ADC12 (AL-alloy)	I125-30-44	1	680,-	27,8
24	pouzdro gufera	A24-0711-0	A24-0012T000001-0	SUS 304	pr.12/17x10	1	160,-	6,6
25	gufero	F25-1701-0	F25-0S170300600-0	NBR	SC-17x30x6	1	90,-	3,7
26	spirála	G26-1G01-0	G26-0125I200000-0	EPDM	I125-2"-40,5	1	550,-	22,5
27	oběžné kolo	G27-0721-0	G27-022045U0000-0	TPUTI95AP+SPCC	2"2P-0,4kW 50Hz-U-100,5-pr.12	1	570,-	23,3
28	sací víko A	B28-1G11-0	B28-0125IZ00001-0	FC 200	I125-Z-14	1	890,-	36,4
28	sací víko B	B28-1G12-0	B28-0125IZ00002-0	FC 200	I125-Z-13	1/A	890,-	36,4
29	otěruvzdorná deska	G29-1G01-0	G29-0038P000000-0	EPDM	P-38*120-8	1	300,-	12,3
30	stojan	B30-1G11-0	B30-0160P000001-0	FC 200	P-160*197*13	1	1 240,-	50,7
31	sací síto	A31-1G11-0	A31-0115U000000-0		U-115*8*pr.3	1	180,-	7,4
37	hrdlo výtlačku	I37-1074-T	I37-01074TF0000-0	ADC12 (AL-alloy)	1"-74-T-PF (LOT1-74)	1	410,-	16,8
41	rukojeť	G41-1G01-0	G41-0U110000000-0	ABS	U-110-60	1	120,-	4,9
47A	těsnění tělesa ucpávky	G47-0851-0	G47-0AG110N0000-0	NBR	O-kroužek 109,4x3,1	1	40,-	1,7
47B	těsnění pláště čerpadla	G47-1703-0	G47-0AA166N0000-0	NBR	O-kroužek 171,12x2,62	1	50,-	2,1
47C	těsnění horního krytu	G47-1G01-0	G47-0DB000N0000-0	NBR	D-B-141-N	1	80,-	3,3
47D	těsnění rukojeti	G47-1G11-0	G47-0DD110E0000-0	EPDM	D-D-110-E	1	50,-	2,1
47F	těsnění výpustné zátky	G47-0102-0	G47-0B0010P0000-0	HDPE	B-0010(10*16*2)-P	1	20,-	0,9
47G	průchodka vodičů	G47-0236-0	G47-0EE023N0000-0	NBR	E-E023(22,5*6)-N	1	30,-	1,3
47H	těsnění stojanu	G47-1443-0	G47-0AG115N0000-0	NBR	O-kroužek 114,4x3,1	1	70,-	2,9
47I	obložení stojanu	G47-1G21-0	G47-0FA205N0000-0	NBR	F-A205(205*20)-N	1	1 030,-	42,1
47J	těsnění hrdla výtlačku	G47-2074-0	G47-0DF074N2000-0	NBR	D-F-074-N-2	1	20,-	0,9
49	kabelová vývodka	G49-1E01-0	G49-0R034000000-0	NEOPRENE	R34-9.3A RA	1	140,-	5,8
52A	vymezovací podložka	H52-6201-0	H52-0A620100000-0	high carbon steel	6201	1	20,-	0,9
52B	podložka ložiska	H52-6202-1	H52-0B015000001-0	SUS 304	6202-15	1	20,-	0,9
53A	podložka	H53-4013-0	H53-0A041000001-0	SUS 304	pr.4 (pr.4,3/9,9-1) A-M4-1	3	20,-	0,9
53B	podložka	H53-1003-0	H53-0A051000001-0	SUS 304	pr.5 (5,4/9,8x1) A-M5	2	20,-	0,9
53C	podložka	H53-1005-0	H53-0A081600000-0	SUS 304	pr.8 (8,5/15,9-1,5)	7	20,-	0,9
53D	podložka O.K.	H53-1005-2	H53-0B081900000-0	SUS 304	pr.8 (8,3/19-1,5) B-M8-1	1	20,-	0,9
54A	pružná podložka	H54-4013-0	H54-0A040000000-0	middle carbon steel	pr.4	1	20,-	0,9
54B	pružná podložka	H54-1004-0	H54-0A060000000-0	SUS 304	pr.6	6	20,-	0,9
54C	pružná podložka O.K.	H54-1005-0	H54-0A080000000-0	SUS 304	pr.8	1	20,-	0,9
55A	šroub 6HR	H55-0515-0	H55-0A050150000-0	SUS 304	M5x15 A	2	20,-	0,9
55B	šroub 6HR	H55-0625-0	H55-0A060250000-0	SUS 304	M6x25 A	3	20,-	0,9
55C	šroub 6HR	H55-0855-0	H55-0A080550000-0	SUS 304	M8x55 (A-M8*55)	3	20,-	0,9
55D	šroub 6HR	H55-0870-0	H55-0A080700000-0	SUS 304	M8x70 (A-M8*70(22))	2	40,-	1,7
55E	šroub imbus	H55-0625-I	H55-0B060250000-0	SUS 304	M6x25 B	3	20,-	0,9
55F	šroub imbus	H55-1016-I	H55-0B100160000-0	SUS 304	M10x16-B	1	30,-	1,3
55G	šroub	H55-0406-3	H55-0C040060002-0	low carbon steel	M4x6 C	2	20,-	0,9
55H	šroub	H55-0408-3	H55-0C040080001-0	SS41	M4x8 C	2	20,-	0,9
56	uzavřená matice	H56-6082-0	H56-0B080000000-0	SUS 304	M8	3	20,-	0,9
64	držák kondenzátoru	H64-2007-0	D13-0B040000000-0	carbon steel + Zn	B-40	1	40,-	1,7

/A - počet kusů pro typ GDR-400A